

## Twin thermostat NCNC





## Description

|                            |                                    |
|----------------------------|------------------------------------|
| <b>Order Number:</b>       | 301211                             |
| <b>Brand Name:</b>         | SOLIFLEX                           |
| <b>Color:</b>              | Grey (RAL 7011)                    |
| <b>Housing Material:</b>   | PC plastic                         |
| <b>Ingress protection:</b> | IP 20                              |
| <b>Note:</b>               | Hyst. $7\pm3K$ / Sw.Pt.tol $\pm4K$ |
| <b>Approvals:</b>          | CE, cURus                          |
| <b>UL File Number:</b>     | E358385                            |

## Technical data

|                                     |                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Operating temperature range:</b> | -40°F - 176°F                                                                                              |
| <b>Setting range:</b>               | 14°F - 176°F                                                                                               |
| <b>Mounting:</b>                    | Clips for DIN rail 1.38 inch                                                                               |
| <b>Dimension H x W x D:</b>         | 2.36 x 2.85 x 1.67 inch                                                                                    |
| <b>Weight:</b>                      | ~3.89 oz.                                                                                                  |
| <b>Voltage / Frequency:</b>         | max. 250 V AC 16 A(res) / 2 A(ind)<br>max. 72 V DC max. 30 W                                               |
| <b>Lifetime:</b>                    | 100,000 hrs.                                                                                               |
| <b>Connection:</b>                  | 2-pole terminal (x2), clamping torque 0.5 Nm max.<br>solid wire - AWG 14 max., stranded wire - AWG 16 max. |

**Cut out  
dimensions:**

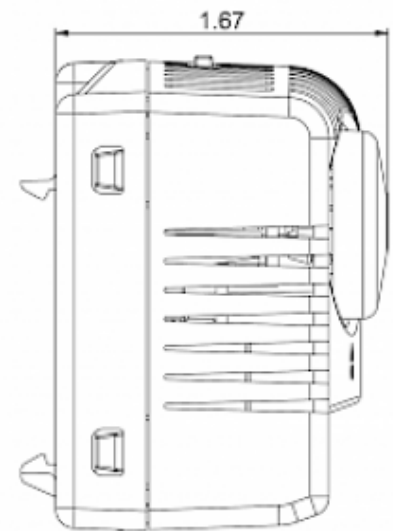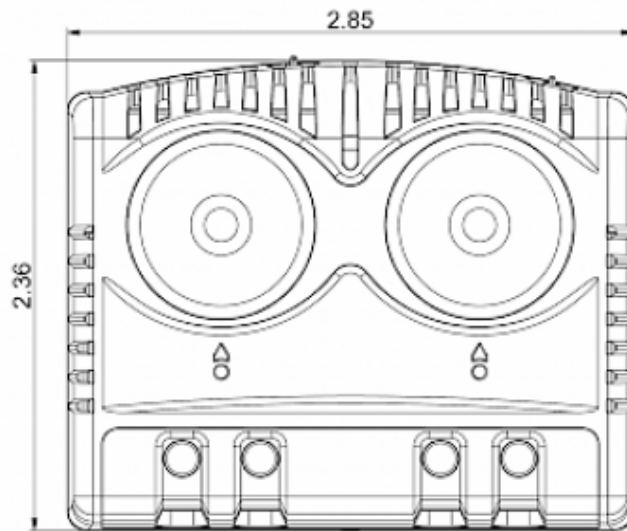

## Order Information

|                        |               |
|------------------------|---------------|
| <b>Zolltarifnummer</b> | 90321089      |
| <b>EAN Nummer</b>      | 5350604010253 |