Enclosure air conditioner

Description

Order Number:	87402584USL
Brand Name:	SOLITHERM PROGRESSIVE
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Included:	Metal mesh filter
Optional:	With stainless steel housing # 87402082USL
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278

Technical data

Cooling capacity 95F/95F:	13305 BTU @ 50 Hz 14670 BTU @ 60 Hz
EER 95F95F:	7 / 5.7
Enclosure heater:	2000 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
High / low pressure:	32 / 6 bar
Operating temperature range:	-40˚F - 140˚F
UL temperature range:	-40˚F - 140˚F
Air volume flow (system / unimpeded):	Ambient: 640 / 880 cfm Enclosure: 520 / 880 cfm
Mounting:	Wall mounted
Dimension H x W x D:	40.9 x 17.9 x 14.6 inch
Weight:	143,3 oz.
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

Performance graph:

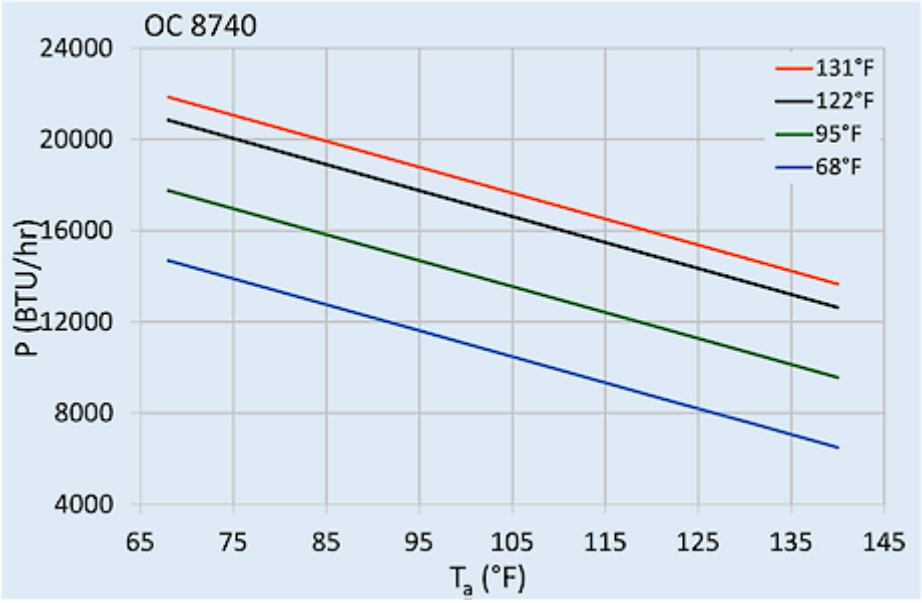

Cut out dimensions:

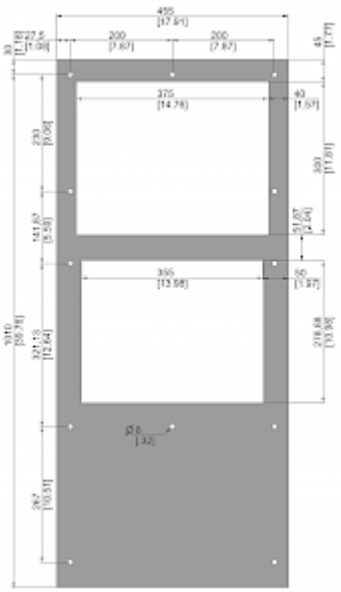

Order Information

Mit 2,000 W Schaltschrankheizung Bestell Nr.	87402184
Mit RS 485 MODBUS Schnittstelle	87402484
Zolltarifnummer	84158200